


DIN3352-F4 / EN1171 RESILIENT SEATED WEDGE GATE VALVE NRS

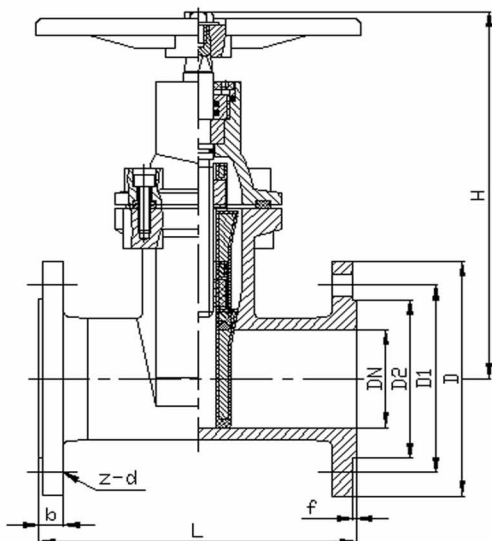

Materials of Parts

Body	Ductile Iron to GGG50
Bonnet	Ductile Iron to GGG50
Disc	Ductile Iron + EPDM
Stem	Stainless Steel to SS420
Stem nut	Brass
Gasket	EPDM
Handwheel	Ductile Iron to GGG50
Bolts & Nuts	SS304 / Carbon Steel with Zinc

Dimension: PN16

Size	D	D1	D2	H	L	b	f	z-d	Weight kg
DN40	150	110	84	203	140	19	3	4-Ø19	8
DN50	165	125	99	240	150	19	3	4-Ø19	10
DN65	185	145	118	270	170	19	3	4-Ø19	13
DN80	200	160	132	300	180	19	3	8-Ø19	15
DN100	220	180	156	330	190	19	3	8-Ø19	18
DN125	250	210	184	375	200	19	3	8-Ø19	29
DN150	285	240	211	425	210	19	3	8-Ø23	36
DN200	340	295	266	515	230	20	3	12-Ø23	56
DN250	405	355	319	600	250	22	3	12-Ø28	94
DN300	460	410	370	685	270	24.5	4	12-Ø28	122
DN350	520	470	429	755	290	26.5	4	16-Ø28	170
DN400	580	525	480	835	310	28	4	16-Ø31	224
DN450	640	585	548	880	330	30	4	20-Ø31	293
DN500	715	650	609	960	350	31.5	4	20-Ø34	394
DN600	840	770	720	1120	390	36	5	20-Ø37	587
DN700	910	840	794	1232	430	39.5	5	24-Ø37	840
DN800	1025	950	901	1405	470	43	5	24-Ø41	1160
DN900	1125	1050	1001	1510	510	46.5	5	28-Ø41	1560

Note: The illustrations in this catalogue are subject to modifications without notice.

MINGPIN MPM METALS

No.69 Wangjiang West Road,Hefei,China
sales@mingpinmetals.com

T: +86-551-64211984 F: +86-551-64211974
www.mingpinmetals.com